

TIRE CHAIN INSTALLATION INSTRUCTIONS

NOTE: Driver side and passenger side chains layout in the opposite directions. Both front and rear wheel drive applications are the same.

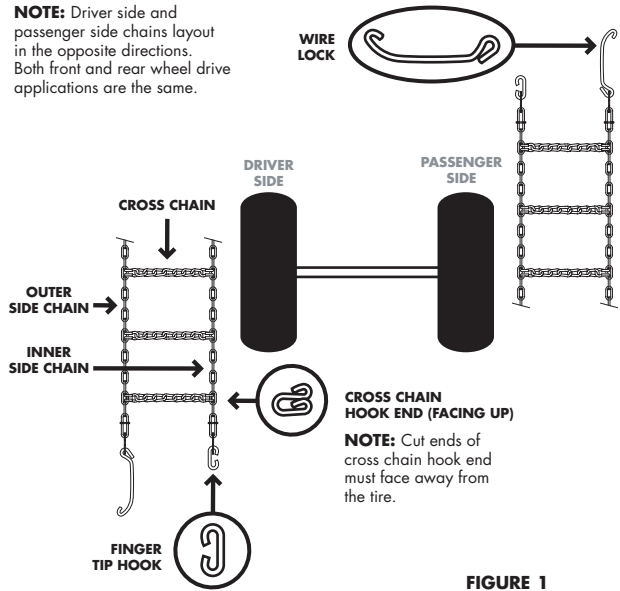


FIGURE 1

- Apply emergency brake.
 - Lay both chains out flat next to tires with cross chain hook ends facing up and wire locks on the outside as shown above in Figure 1.
 - Straighten all twisted links.

- Drape tire chains up and over tops of tires and tuck last cross chains under each tire, as shown in Figure 2.
 - Ensure that cross chain hook ends face away from tire.



FIGURE 2

- Release emergency brake and move car slowly until the wire lock is roughly axle high, as shown in figure 3.
 - Apply emergency brake.
- Hook up the inner side chains first. To do this, reach around tire with both hands, gently tug on both ends of inner side chain to remove slack, and attach finger tip hook inside a link.



FIGURE 3

NOTE: Do not tug on inner side chain too hard because doing so can pull outer side chain over the top of the tire.

- Hook up the outer side chains. To do this, tug firmly on both ends of outer side chain to remove slack.
 - Thread the wire lock through a link as shown in Figure 4. (Choose a link that makes the chains hand-tight and that results in the same number of excess side chain links on the inner and the outer side chains.)



FIGURE 4

NOTE: Before closing the wire lock, center cross chains over tire tread, and thread last extra link (if any) through the wire lock.

- Fold wire lock back and slip its end hook through a link in the side chain, as shown in Figure 5.



FIGURE 5

- Drive 1/4 mile and re-tighten chains as necessary to remove slack. This will increase the wear life of your chains.

FOR BEST TRACTION AND WEAR

- If possible, fit your tire chains before they are actually needed. If appropriate, cut off or double back surplus side chain and/or remove last cross chain in order to obtain a snug fit.
- Chains should be put on hand-tight and should be re-tightened as slack occurs. For maximum chain life do not exceed 30 MPH.
- Avoid twists and kinks in side chains and cross chains. Be sure side chain with wire lock is on outside of tire and that cross chain hook eyes face away from tire.
- To keep your tire chains tight, see your Peerless dealer for Peerless chain tighteners.



**CHAIN TIGHTENER
PART NUMBERS**
2007020 – Passenger
2007190 – Light Truck

**SPEEDS OVER
30MPH,
IMPROPER
INSTALLATION OR
IMPROPER FIT
VOIDS THIS
WARRANTY.**

TRACTION TIRE CHAINS

TIRE CHAINS & TRACTION CABLES

WARNING:

Always practice installing tire chains before you actually need them. Tire sizes can vary by manufacturer therefore it is important to check for proper fit before the actual need arises.

Tire chains are not to be used on snow tires.

Never exceed 30 MPH while the chains are installed. Accelerate slowly and evenly. Avoid spinning your tires. The life of your chains will vary according to road conditions, driving speed and individual driving habits.

The Following are some activities that can cause unnecessary wear to your tire chains:

- Locking your wheels when braking
- Driving on bare pavement that is not covered with snow or ice
- Hitting curbs
- Installing the chains improperly

CAUTION:

Tire chains are designed only to provide extra traction in severe winter weather emergencies. Drivers should always exercise caution and observe driving conditions during hazardous weather. Please use good judgment in using this product.

In the event that a cross-chain should break, immediately pull off the road to a safe place and remove, or tie back the cross chain. Do not continue driving with a broken cross chain.

Vehicle wheel-well clearance for traction devices is the responsibility of the automobile manufacturer. Please refer to your vehicle's owner manual for more details.

Use tire chains only as a traction device. Do not use them for any other purpose, including towing or lifting.

- **Apply emergency brake.**

90 DAY LIMITED WARRANTY

(A) DISCLAIMER OF WARRANTIES: Peerless warrants free from defects in workmanship and material for 90 days from purchase date of this product to owner. Warranty does not include damage due to product failure, misuse, abuse or cost of inconvenience. If a side or cross chain breaks in use **STOP IMMEDIATELY** and remove the chain. Continued travel with a broken chain can cause damage to your vehicle and is a breach of warranty. Under no circumstances will Peerless be liable for any special or consequential damages resulting from the continued use of a broken chain. No other express warranty is given and no affirmation, by words or action, shall constitute a warranty.

(B) REMEDIES: The buyer's sole remedy for breach of any warranty is limited exclusively to obtaining, at the discretion of the seller, either credit or repair or replacement of any product sold hereunder and manufactured by Peerless Chain Company within 90 days after delivery to the owner.

Defective product may be brought to the place of purchase, or returned, freight prepaid, to Peerless Chain Company, 1416 E. Sanborn Street, Winona, MN 55987

**SPEEDS OVER 30MPH,
IMPROPER INSTALLATION OR IMPROPER FIT
VOIDS THIS WARRANTY.**

Although this warranty gives you specific rights, you may have other legal rights which differ from state to state. For more information please write: Peerless Chain Company, 1416 East Sanborn Street, P.O. Box 5349, Winona, MN 55987-5349

TIRE CHAIN INSTALLATION INSTRUCTIONS

